


- **HD Process PVC Static Mixers**
- **12 fold (customisable)**
- **1/2" through to 8"**
- **Available in Grey and See through PVC**
- **Options for screwed, flanged and (glued) socket**
- **Line pressures up to 10 bar (grey), 7 bar (clear)**

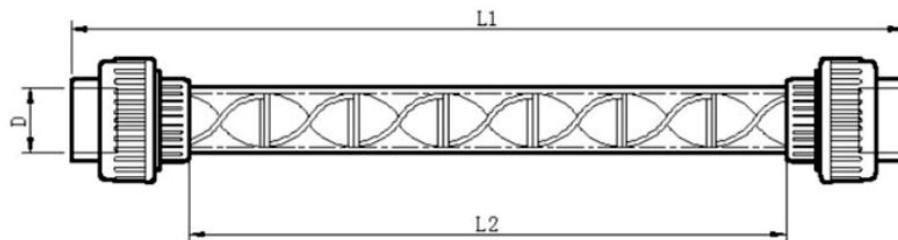

Transparent (CPVC) Static Mixer (up to 7 bar line pressure)

Model	Diameter (mm)	L1 (mm)	L2 (mm)	Flow (cubic meter per hour)
KH-TDN15 (1/2")	20	252	156	0.4-1
KH-TDN20 (3/4")	25	330	225	0.6-1.2
KH-TDN25 (1")	32	420	292	1-3.2
KH-TDN32 (1.25")	40	495	336	1.4-6
KH-TDN40 (1.5")	50	565	406	2.2-8
KH-TDN50 (2")	63	695	497	3.5-18
KH-TDN65(2.5")	75	900	642	10-60
KH-TDN80(3")	90	880	770	15-80
KH-TDN100(4")	110	990	850	30-120
KH-TDN150(6")	116	955	800	90-190
KH-TDN200(8")	225	1020	790	150-340

Grey (CPVC) Static Mixer (up to 10 bar line pressure)

Model	Diameter (mm)	L1 (mm)	L2 (mm)	Flow (cubic meter per hour)
KH-GDN15 (1/2")	20	252	156	0.4-1
KH-GDN20 (3/4")	25	330	225	0.6-1.2
KH-GDN25 (1")	32	420	292	1-3.2
KH-GDN32 (1.25")	40	495	336	1.4-6
KH-GDN40 (1.5")	50	565	406	2.2-8
KH-GDN50 (2")	63	695	497	3.5-18
KH-GDN65(2.5")	75	900	642	10-60
KH-GDN80(3")	90	880	770	15-80
KH-GDN100(4")	110	990	850	30-120
KH-GDN150(6")	116	955	800	90-190
KH-GDN200(8")	225	1020	790	150-340

CONNECTION OPTIONS:

1. spigot and socket (gluing sleeve)
2. BSP male thread
3. BSP female thread.
4. Flanged on request