


Tassalini Check Valves

W64 V

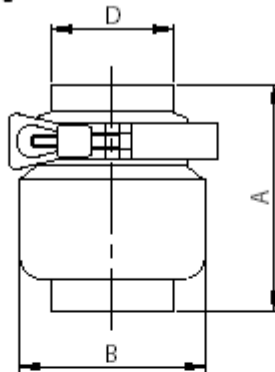

DN	A	B	D	gr
1/2" 12	74,0	25,0	12,7	240
3/4" 19	75,0	40,0	19,0	520
1" 25	94,0	50,5	25,4	880
1" 1/2" 38	95,0	64,0	38,1	1.070
2" 51	102,0	77,5	50,8	1.750
2" 1/2" 63	111,0	91,0	63,5	2.140
3" 76	125,0	119,0	76,2	3.950
4" 101	136,0	131,0	101,6	4.900

CHECK VALVES

- High strength construction from solid stainless steel block.
- Wide diaphragm opening to permit passage of solid particles.
- PTFE sealing gasket or other elastomers on request.
- Equipped with low-pressure springs allowing either vertical or horizontal valve operation.
- Maximum operating pressure: 15 bars.