

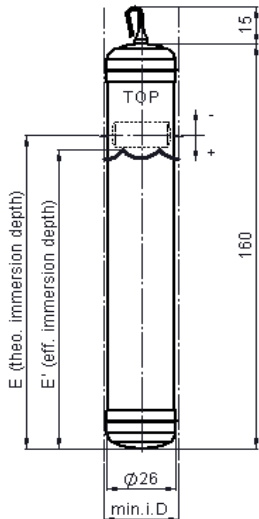


order reference
33115/05 (< 5 bar@20 °C)
33115/30 (m30 bar@20 °C)

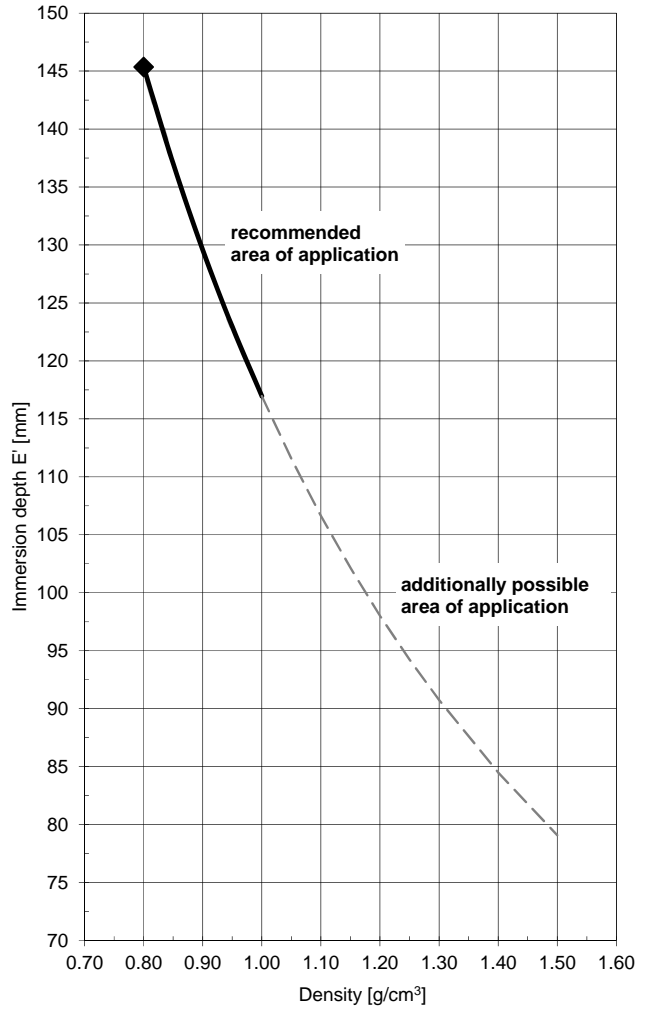

order reference²⁾
33115/40 (m40 bar@20 °C)¹⁾
33115/60 (m60 bar@20 °C)¹⁾

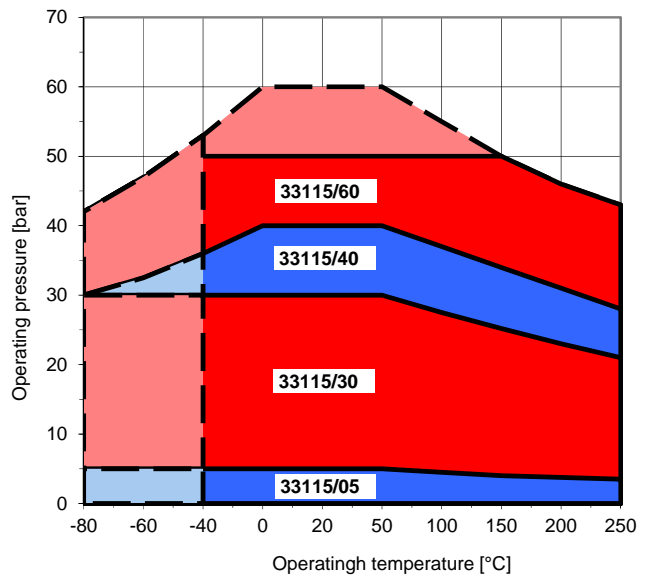

technical details

material	316L
max. operating pressure ¹⁾	5; 30; 40; 60 bar@20 °C
max. test pressure ¹⁾	5; 30; 40; 60 bar@20 °C
min. density	0.8 g/cm ³
pipe min. ID	28/32 mm
theo. immersion depth E	147.9 mm
eff. immersion depth E'	see diagram

commentary

¹⁾ corresponds max. operating/test pressure in bar

²⁾ 33115/40 und 60 = preload pressure in bar