

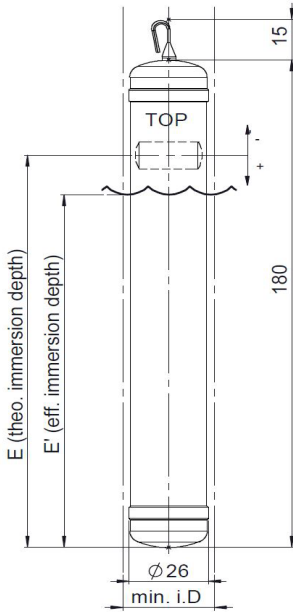


order reference
 48150/05 (< 5 bar@20 °C)
 48150/30 (≤ 30 bar@20 °C)

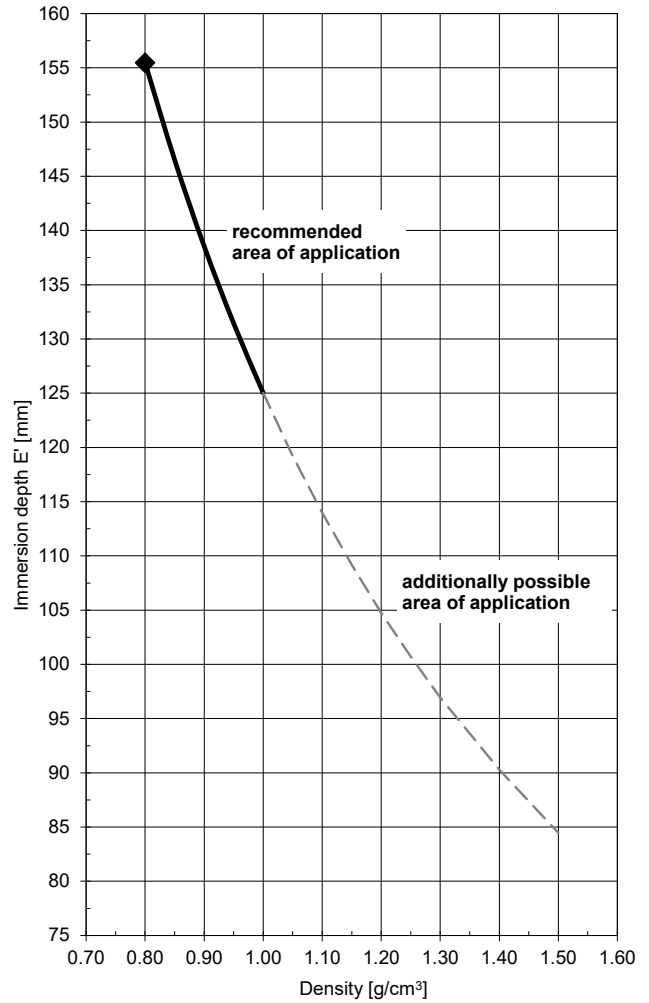

order reference ^{*2)}
 48150/40 (≤ 40 bar@20 °C) *1)
 48150/60 (≤ 60 bar@20 °C) *1)

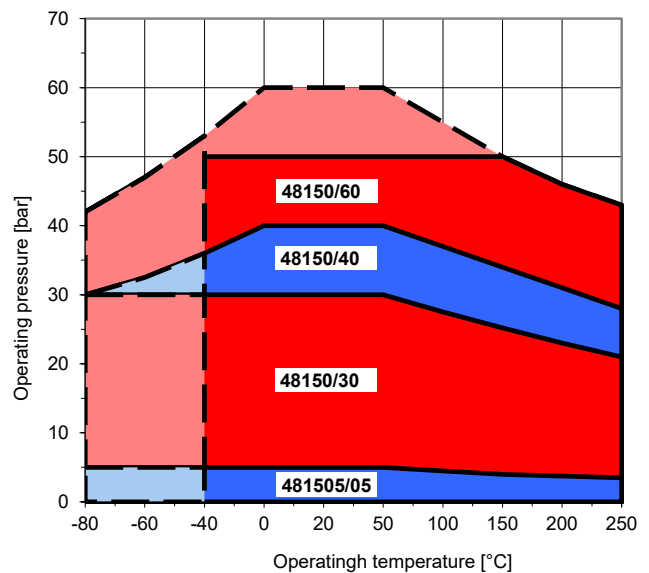

technical details

material	316L
max. operating pressure ^{*1)}	5; 30; 40; 60 bar@20 °C
max. test pressure ^{*1)}	5; 30; 40; 60 bar@20 °C
min. density	0.8 g/cm ³
pipe min. ID	28/32 mm
theo. immersion depth E	155.5 mm
eff. immersion depth E'	see diagram

commentary

^{*1)} corresponds max. operating/test pressure in bar

^{*2)} 48150/40 und 60 = preload pressure in bar